


Performance	ENGLISH	SI	
Sensitivity (±5 %)	100 mV/g	10.2 mV/(m/s ²)	[2]
Measurement Range	±50 g	±490 m/s ²	
Frequency Range (±5 %)	60 to 240000 cpm	1 to 4000 Hz	[3]
Frequency Range (±10 %)	40 to 390000 cpm	0.67 to 6500 Hz	
Frequency Range (±3 dB)	20 to 720000 cpm	0.33 to 12000 Hz	
Resonant Frequency	1080 kcpm	18 kHz	[1]
Broadband Resolution (1 to 10000 Hz)	1000 µg	9810 µm/s ²	[1]
Non-Linearity	±1 %	±1 %	[4]
Transverse Sensitivity	≤5 %	≤5 %	
Environmental			
Overload Limit (Shock)	5000 g pk	49050 m/s ² pk	
Temperature Range	-65 to +250 °F	-54 to +121 °C	
Temperature Response	See Graph	See Graph	[1]
Enclosure Rating	IP68	IP68	
Electrical			
Settling Time (within 1% of bias)	≤10 sec	≤10 sec	
Discharge Time Constant	≥0.5 sec	≥0.5 sec	
Excitation Voltage	18 to 28 VDC	18 to 28 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	<100 ohm	<100 ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Spectral Noise (10 Hz)	50 µg/√Hz	491 (µm/s ²)/√Hz	[1]
Spectral Noise (100 Hz)	20 µg/√Hz	196 (µm/s ²)/√Hz	[1]
Spectral Noise (1 kHz)	6 µg/√Hz	59 (µm/s ²)/√Hz	[1]
Electrical Protection	RFI/ESD	RFI/ESD	
Electrical Isolation (Case)	>10 ⁸ ohm	>10 ⁸ ohm	
Physical			
Size (Hex x Height)	7/8 in x 2.06 in	22 mm x 52.3 mm	
Weight	3.3 oz	94 gm	
Mounting Thread	1/4-28 Female	Not Applicable	[5]
Mounting Torque	2 to 5 ft-lb	2.7 to 6.8 N-m	
Sensing Element	Quartz	Quartz	
Sensing Geometry	Shear	Shear	
Housing Material	Stainless Steel	Stainless Steel	
Sealing	Welded Hermetic	Welded Hermetic	
Electrical Connector	2-Pin MIL-C-5015	2-Pin MIL-C-5015	
Electrical Connection Position	Top	Top	

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

CS - Canadian Standards Association Approved Intrinsically Safe			
Hazardous Area Approval	CI I, Div I, Groups A, B, C, D; CI II, Div I, Groups E, F, G; CI III, Div I	CI I, Div I, Groups A, B, C, D; CI II, Div I, Groups E, F, G; CI III, Div I	
Hazardous Area Approval	Exia IIC T4, AExia IIC, T4	Exia IIC T4, AExia IIC, T4	
Hazardous Area Approval	CI I, Div 2, Groups A, B, C, D; ExnL IIC T4, AExnA IIC T4	CI I, Div 2, Groups A, B, C, D; ExnL IIC T4, AExnA IIC T4	
EX - ATEX, CSA, or ATEX and CSA Hazardous Area Approval			
Hazardous Area Approval	EEx ia IIC T4, -54°C≤Ta≤121°C, II 1 G	EEx ia IIC T4, -54°C≤Ta≤121°C, II 1 G	
LB - Low Bias Voltage			
Output Bias Voltage	6 to 8 VDC	6 to 8 VDC	
Excitation Voltage	12 to 28 VDC	12 to 28 VDC	
Measurement Range	±35 g	±343 m/s ²	
M - Metric Mount			
Supplied Accessory: Model M081A61 Mounting stud, 1/4-28 to M6 x 1 replaces Model 081A40			
Notes			
[1] Typical.			
[2] Conversion Factor 1g = 9.81 m/s ² .			
[3] The high frequency tolerance is accurate within ±10% of the specified frequency.			
[4] Zero-based, least-squares, straight line method.			
[5] 1/4-28 has no equivalent in S.I. units.			
[6] See PCB Declaration of Conformance PS023 or PS061 for details.			
Supplied Accessories			
081A40 Mounting Stud (1)			
ICS-1 NIST-traceable single-axis amplitude response calibration from 600 cpm (10 Hz) to upper 5% frequency ()			

Entered: BLS	Engineer: JEC	Sales: JJ	Approved: NJF	Spec Number:
Date: 11/11/2008	Date: 11/07/2008	Date: 11/10/2008	Date: 11/07/2008	8312

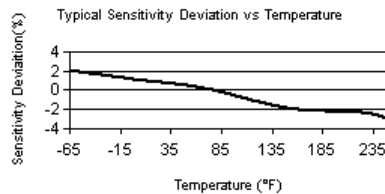

3425 Walden Avenue
 Depew, NY 14043
 UNITED STATES
 Phone: 716-684-0003
 Fax: 716-684-3823
 E-mail: imi@pcb.com
 Web site: www.imi-sensors.com

All specifications are at room temperature unless otherwise specified.

In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB group, Inc.